V34 Nozzles



VAPOR RECOVERY

Pressure-activated, automatic shut-off vacuum assist nozzle for full-service and self-service stations.

- V34 nozzle shuts off when:
 - the pump shuts off.
 - the gas tank is full.
 - the lever is opened before the pump is turned on.
 - the leak detector has not completed the test cycle.
- Stainless steel reinforced spout bushing keeps spout tip round, and acts as a captive fastener to prevent tip-end sensor damage.
- Nozzle is equipped with a unique Flo-Stop[®] devicet hat shuts off the nozzle if it falls from the fill neck or raises above the horizontal.
- StreamShaper[®] reduces • turbulence for straighter fuel flow and less splash back spillage.
- Tilt poppet design provides precise "to-the-penny" dispensing.

- Strong vapor valve in the nozzle that is mechanically operated by the on-off action of the nozzle's lever.
- Husky[®] vapor return line is an internal part of the body casting, thus eliminating potential vapor leak points and fugitive evaporative emissions from the fuel remaining in the vapor path of the hose.
- Vapor assist achieved at the body end of the spout where a vapor ring catches emissions.

- Uses conventional unleaded spout with spout ring and soft vapor escape guard.
- Nozzle comes standard with a full grip guard.
- Optional cold weather seals are rated to -40°F/C.
- Optional Gilbarco, Tokheim, and Wayne handguards can be fitted with a magnet to trigger the dispenser's proximity switch, or can be provided without the magnet for dispensers equipped with a standard "flapper" switch.
- Optional vapor insert increases the vapor back pressure, closely matching that of the competition, and making installation a breeze, with little-to-no changes to the vacuum pump draw.
- Optional sightglass provides a clear window for the customer to view the fuel as it passes through the main poppet valve.

New Unleaded PHG Nozzles

MODEL NO.	DESCRIPTION SHIPPING WEIG	HT LBS (KG)
6250041	with Three Notch Hold Open Clip and Vapor Emissions Guard	3.3 (1.5)
6250431	with Single Notch Hold Open Clip and Vapor Emissions Guard	3.3 (1.5)
62501061	with Two Notch Hold Open Clip and Vapor Emissions Guard	3.3 (1.5)
6250041A*	with Three Notch Hold Open Clip and Vapor Emissions Guard	3.3 (1.5)
6250041N^	with Three Notch Hold Open Clip and Vapor Emissions Guard	3.3 (1.5)
15671271N^	with Three Notch Hold Open Clip, Gradual Pressure Relief and Vapor Emissions Guard	3.3 (1.5)
15999271N^	with Three Notch Hold Open Clip, E25 Seals and D Gradual Pressure Relief and Vapor Emissions Guard	
		^ NOT LISTED

MODEL NO. 6250041

RESOURCES BOARD












V34 Nozzles


Pressure-activated, automatic shut-off vacuum assist nozzle for full-service and self-service stations.

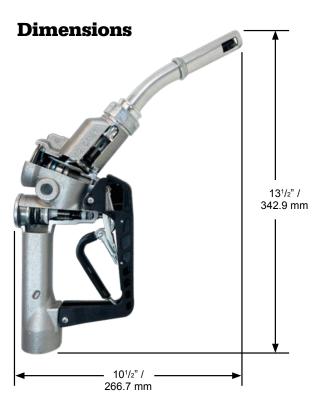


Construction

Body	One piece sand cast aluminum with high-impact polymer handguard		
Seals	Fluorocarbon		
Packing	Double o-ring seal protected by fiber-reinforced Teflon®		
Lever	One piece contoured steel with hard polymer lever cover		
Inlet	M34 x 1.5mm		










VAPOR RECOVERY



V34 Nozzles

Pressure-activated, automatic shut-off vacuum assist nozzle for full-service and self-service stations.

Nozzle Options

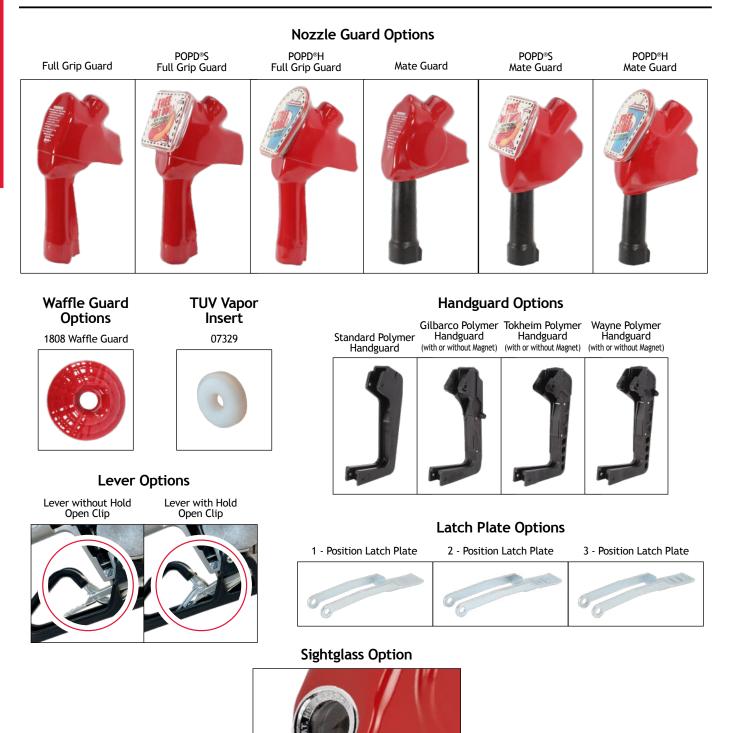



V34 Nozzles

Pressure-activated, automatic shut-off vacuum assist nozzle for full-service and self-service stations.

System Options

Safe-T-Breaks®

DESCRIPTION			
Reconnectable Safe-T-Break®			
Reconnectable Safe-T-Break® - Atex			
Non-Reconnectable Safe-T-Break® - Atex			
Non-Reconnectable Safe-T-Break®			
MAGBREAK® Coax M34 CK			
Non-Reconnectable Safe-T-Break® - Shearpin			

Spouts

_	
MODEL NO.	DESCRIPTION
006291	V34 Spout Assy Kit (Includes 004000 VSG and 006391 Spout Assembly)
006391	V34 Spout Assembly with Streamshaper®

Pressure/Vacuum Vents

MODEL NO.	DESCRIPTION
004620	2" Slip-On Pressure Vacuum Vent
004885	2" Thread-On Pressure Vacuum Vent - NPT
005885	2" Thread-On Pressure Vacuum Vent with Internal Screen - NPT

Accessories, Testing and Maintenance

MODEL NO.	DESCRIPTION			
000397	Unleaded Spout Gauge			
003593	Hold Open Clip Kit			
004000	Vapor Splash Guard (VSG) with Clamp			
004039	/apor Splash Guard Clamp			
004335	O-ring, Air / Liquid Test Spout Adaptor			
004360	Air / Liquid Spout Adaptor			
005233	O-ring Kit			
005260	Tool for dry Air / Liquid Test			
005837	Vapor Assist Flo-Equalizer®			
006497	VSG Clamp Tool			
006941	Hose Conversion Adaptor M34 x 1.5			
007089	Nozzle Service Kit			
010073	Waffle VSG with Clamp (single notch V34)			
010076	Waffle VSG without Clamp (single notch V34)			

Swivels

MODEL NO.	DESCRIPTION	
004605	Multi-Plane Swivel	
004605A*	Multi-Plane Swivel - Atex	

Guards

ci di ci i di s				
MODEL NO.	DESCRIPTION			
004231	Full Grip Reguard			
005494	Lever Guard			
006628	POPD® S Clear Cover			
006660	POPD [®] S Full Grip Guard			
006951	Full Grip Guard			
007220	POPD® S Full Grip Reguard			
007999	POPD® H Clear Cover			
008184	POPD® H Full Grip Guard			
008191	POPD® H Full Grip Reguard			
010089	Black Handle Cover			
014526	Mate Guard			

Guard Color Chart

COLOR	SUFFIX	COLOR	SUFFIX	COLOR CUSTOM	SUFFIX
Blue	-01	Gold	-08	Amoco Blue	-07 сизтом
Red	-02	Silver	-09	Apple Green	-18 сизтом
Green	-03	BP Green	-16	Purple	-19 сизтом
Black	-04	M Blue	-25	Pink	-20 сизтом
Yellow	-05	Orange	-39	BPS Green	-22 сизтом
White	-06				

Scuff Guards are to be ordered with the corresponding guard color option added to the model number. Example: If BLUE guards are desired, add guard color option -01 to the model number (159504-01). For custom colors, a minimum order of 4,000 guards will be required.



